

Telehandler

T4514



13.70m

Working height

4500kg

Load capacity

DISTRIBUTOR:

multico
Asia's Equipment Specialist


Multico Equipment Services Sdn Bhd (Co. No. 807528-D)
No.2, Jalan P/9B, Seksyen 13, Kawasan Perindustrian Bangi,
43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia.
Tel : (603) 8913 6788 Fax : (603) 8913 6799
Email : info@mes.multicoasia.com
Website : www.multicoequipmentservices.com

DEALER:




Load Chart

Outrigger Up

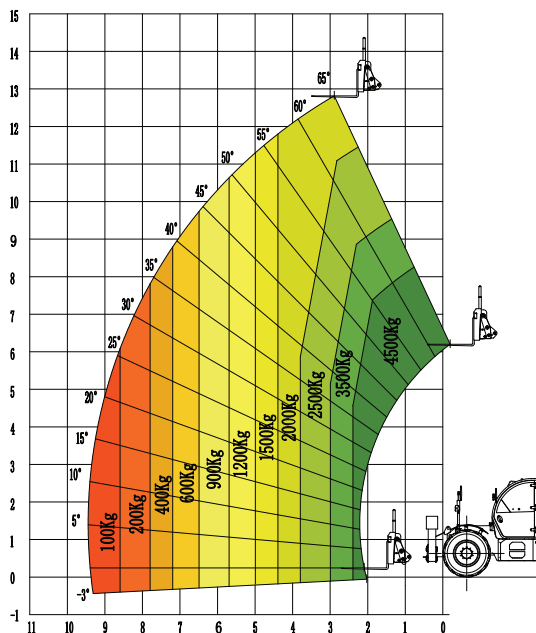

Outrigger Down

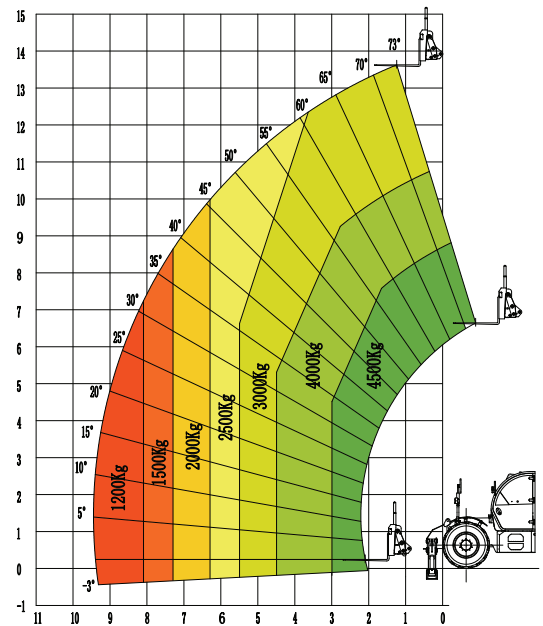

Machine Parameters

MODELS		T4514
System	Measurements	Metric
Machine Parameters	Max. Lift Capacity	4,500kg
	Max. Lift Height	13,700mm
	Overall Length	6,220/7,610mm
	Overall Width	2,460mm
	Overall Height	2,600mm
	Max. Outreach at Max Height	1,150mm
	Max. Working Distance	9,250mm
	Weight	12,465kg
	Ground Clearance	430mm
	Min. Turning Radius	4,200mm
	Driving Speed	35km/h
	Grade Ability	50%
Power System	Power Source	Cummins QSB 3.9
	Emissions Tander	III
	Rated Power	72/93kW
	Max. Torque	300Nm/1,300-1,600rpm 480Nm/1,300-1,600rpm
Driving System	Driving Mode	Hydrostatic Drive
	Driving	4X4
	Steering Mode	2ws, Crab Steer, 4ws
	Tires	15.5-25PR-TL
Tank Capacity	Fuel Tank Capacity	150L
	Hydraulic Oil Capacity	180L
Keyparts Configuration	Engine	Cummins III
	Axle	Carraro
	Hydraulic Pump	Hengli/Inline
	Multiplex Valve	Husco
	Cab	Closed, AC, LED Lights
	Attachment	48in Fork

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirements of different functions.

