

Telehandler

T4517



16.9m **4500kg**
Working height Load capacity

DISTRIBUTOR:

multico

Asia's Equipment Specialist

Multico Equipment Services Sdn Bhd (Co. No.807582-D)

No.2, Jalan P/9B, Seksyen 13,
Kawasan Perindustrian Bangi,
43650, Bandar Baru Bangi, Selangor Darul Ehsan, Selangor

Tel : (603) 89136788 Fax : (603) 89136799


Email : info@mes.multicoasia.com

Website : www.multicoequipmentservices.com




Load Chart

Outrigger Up

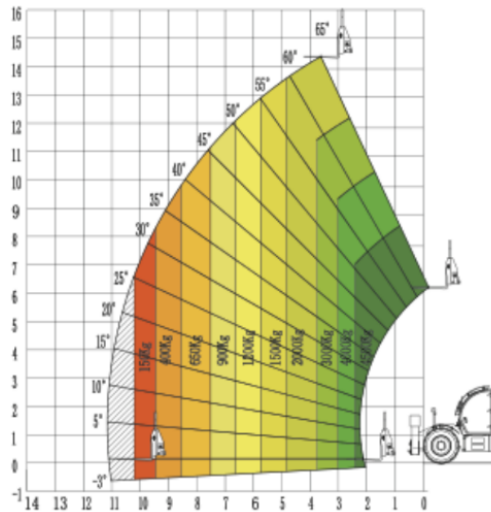

Outrigger Down

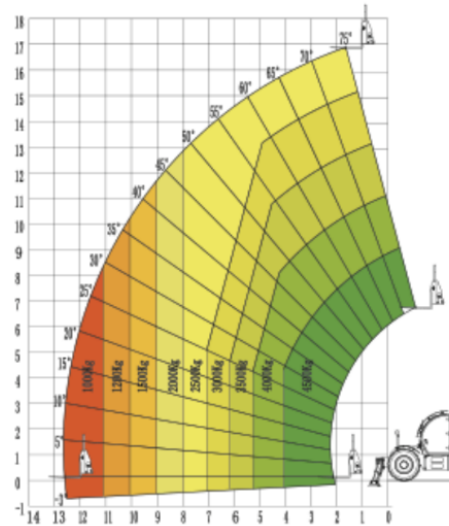

Machine Parameters

System	Measurements	Metric
Machine Parameters	Max. Lift Capacity	4,500kg
	Max. Lift Height	16,900mm
	Length(/with fork)	6,315/7,715mm
	Width	2,460mm
	Height	2,600mm
	Reach at Max Height	1,650mm
	Max. Forward Reach	12,650mm
	Operational Weight	14,175kg
	Ground Clearance	430mm
	Turning radius(outside)	4,200mm
	Drive Speed	35km/h
	Gradeability(laden)	50%
Power System	Power Source	Cummins QSB 3.9
	Emission Norm	III
	Rated power	93kW
	Max. Torque	330Nm/1,300-1,600rpm
Transmission System	Transmission mode	Hydrostatic Drive
	Driving	4x4
	Steering Mode	2ws, Crab Steer, 4ws
	Tires	15.5-25
Tank Capacity	Fuel Tank Capacity	150L
	Hydraulic Tank Capacity	180L

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

