

Telehandler

T4007



7.15m

Working height

4000kg

Load capacity

DISTRIBUTOR:


multico
Asia's Equipment Specialist

Multico Equipment Services Sdn Bhd (Co. No. 807528-D)
No.2, Jalan P/9B, Seksyen 13, Kawasan Perindustrian Bangi,
43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia.
Tel : (603) 8913 6788 Fax : (603) 8913 6799
Email : info@mes.multicoasia.com
Website : www.multicoequipmentservices.com

DEALER:



Load Chart

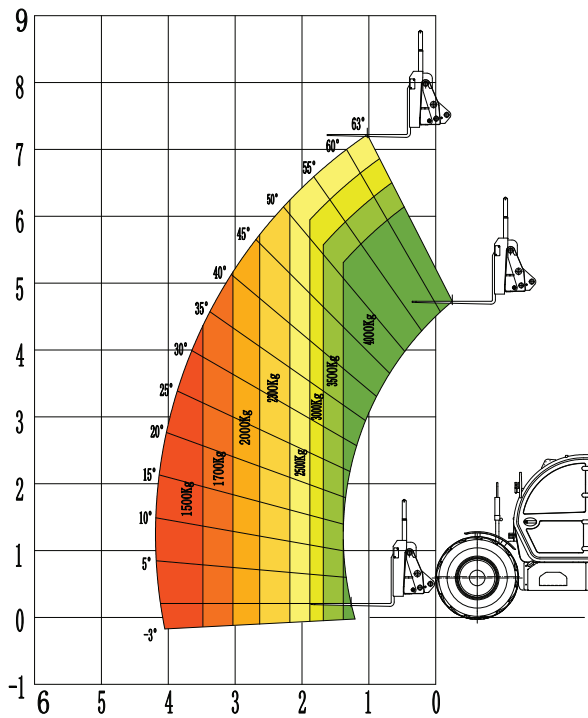

Machine Parameters

MODELS		T4007
System	Measurements	Metric
Machine Parameters	Max. Lift Capacity	4,000kg
	Max. Lift Height	7,150mm
	Overall Length	5,075/6,465mm
	Overall Width	2,300mm
	Overall Height	2,470mm
	Max. Outreach at Max Height	950mm
	Max. Working Distance	4,150mm
	Weight	8,640kg
	Ground Clearance	400mm
	Min. Turning Radius	3,800mm
	Driving Speed	40km/h
	Grade Ability	55%
Power System	Power Source	Cummins QSB 3.9
	Emissions Tander	III
	Rated Power	72/93kW
	Max. Torque	330Nm/1,300-1,600rpm 480Nm/1,300-1,600rpm
Driving System	Driving Mode	Hydrostatic Drive
	Driving	4X4
	Steering Mode	2ws, Crab Steer, 4ws
	Tires	405/70-24PR-TL
Tank Capacity	Fuel Tank Capacity	120L
	Hydraulic Oil Capacity	150L
Keyparts Configuration	Engine	Cummins III
	Axle	Carraro
	Hydraulic Pump	Hengli/Inline
	Multiplex Valve	Husco
	Cab	Closed, AC, LED Lights
	Attachment	48in Fork

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirements of different functions.

